



CBIsolid B

Through All Your Ups and Downs.

DESCRIPTION

Icon. With its minimalist styling creating a modern look and feel, the CBIsolid B is the perfect addition to any adjustable desk design. Mounted discreetly under the tabletop, the soft touch buttons and responsive functionality enable stylish, stress-free adjustment – in combination with LOGICDATA's renowned Control Box technology.

FEATURES

- Modern Look & Feel
- Soft Touch Buttons
- Responsive Up / Down Function
- Under-desk Mounting




Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America


LOGICDATA North America Inc., 5300 Broadmoor Ave SE,
Suite D, Grand Rapids, MI 49512, USA, office.na@logicdata.net



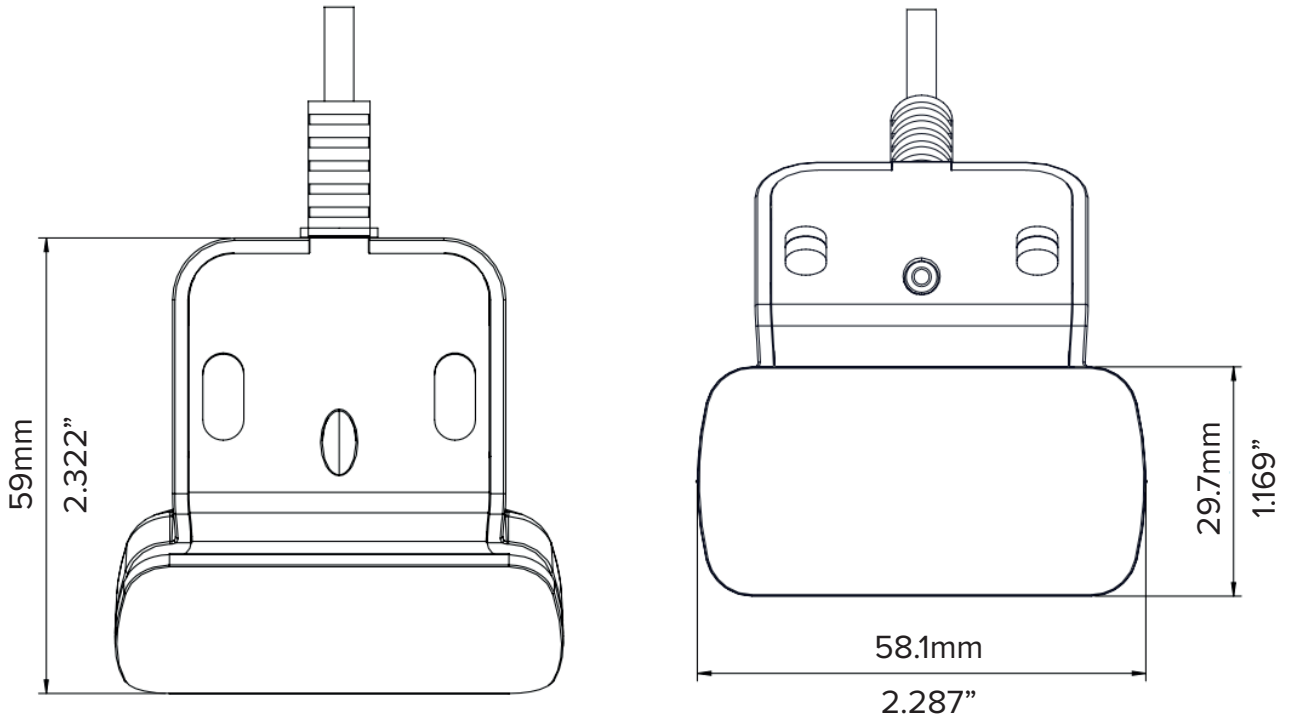

TECHNICAL DATA

Supply voltage	5 V DC \pm 10%
Current Consumption (average)	<1 mA
Rated switching current	50 mA
Cable length	1800 mm
Dimensions (l x w x h)	59 x 58.1 x 29.7 mm / 2.322" x 2.287" x 1.169"
Ambient conditions during operation	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2,000 m.
Ambient conditions during transport and storage	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to +60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than 40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
Compatibility	All LOGICDATA Control Boxes, except integrated Control Units in the LOGICdrive and DYNAMIC MOTION families.
Degree of protection (IEC 60529)	IP 20
Standards and regulations	RoHS directive 2011/65/EU
Order Code	CBIsolid-B-y-z


 Reserved, standard is blank
 Customer Code, up to 3 characters, standard is "LD"