



COSMO Sydney US

Pure and Simple.

DESCRIPTION

The COSMO Sydney is a sanctuary for young, urban households with an eye for stunning ergonomic design. A perfectly-optimized core feature set – with smooth up/down motion and programmable memory positions – makes this stylish adjustable an ideal addition to the homes of users who value maximum flexibility with minimum cost, space, and fuss.

The minimalistic COSMO Sydney not only provides the flexibility that users desire, it does so via a low-profile design that means moving the bed – from room to room or to whole new living spaces – incredibly simple. In fact, a single person can assemble the entire bed frame in just a few minutes

Available sizes:

Twin XL, Full, Queen, King, Cal. King (other sizes on request)

FEATURES

- Low-profile frame with the smallest packaging
- Single-person assembly in just a few minutes
- Head up and foot up
- Wireless remote control
- Child lock
- Pre-set flat button
- 2 pre-defined memory positions
- Emergency lowering
- Free-fall design
- Zero clearance
- 700 lbs weight limit
- 10-year limited warranty


Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net


North America

LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,
Cedar Springs, MI 49319, USA, office.na@logicdata.net



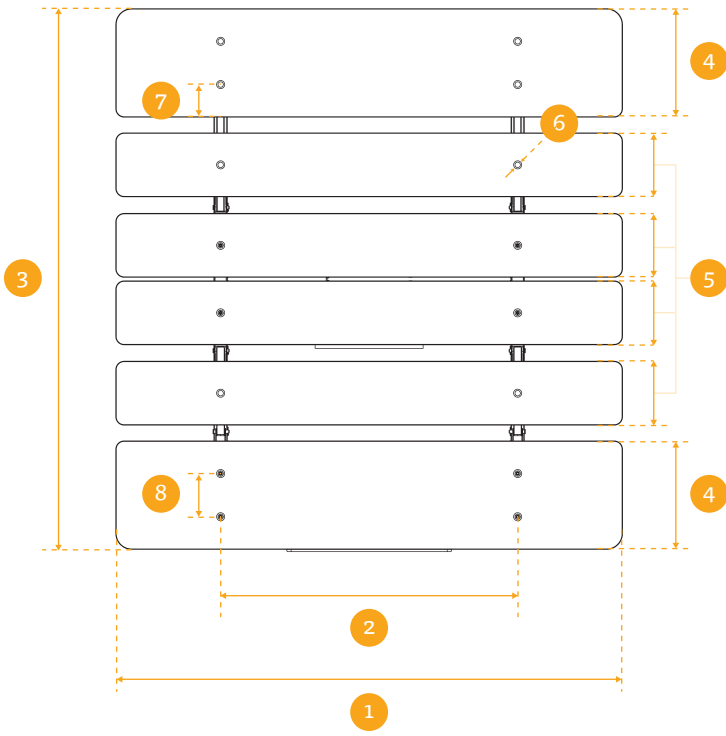

	Twin XL	Full	Queen	King	Cal. King
1	36.9" ± 0.06"	53.2" ± 0.06"	58.0" ± 0.06"	73.9" ± 0.06"	70.0" ± 0.06"
2	26.0" ± 0.04"	35.4" ± 0.04"	35.4" ± 0.04"	43.4" ± 0.04"	43.4" ± 0.04"
3	78.7" ± 0.2"	78.7" ± 0.2"	78.7" ± 0.2"	78.7" ± 0.2"	78.7" ± 0.2"
4	15.0" ± 0.06"	15.0" ± 0.06"	15.0" ± 0.06"	15.0" ± 0.06"	15.0" ± 0.06"
5	9.25" ± 0.06"	9.25" ± 0.06"	9.25" ± 0.06"	9.25" ± 0.06"	9.25" ± 0.06"
6	Ø 0.93" ± 0.02"	Ø 0.93" ± 0.02"	Ø 0.93" ± 0.02"	Ø 0.93" ± 0.02"	Ø 0.93" ± 0.02"
7	4.72" ± 0.04"	4.72" ± 0.04"	4.72" ± 0.04"	4.72" ± 0.04"	4.72" ± 0.04"
8	6.30" ± 0.04"	6.30" ± 0.04"	6.30" ± 0.04"	6.30" ± 0.04"	6.30" ± 0.04"

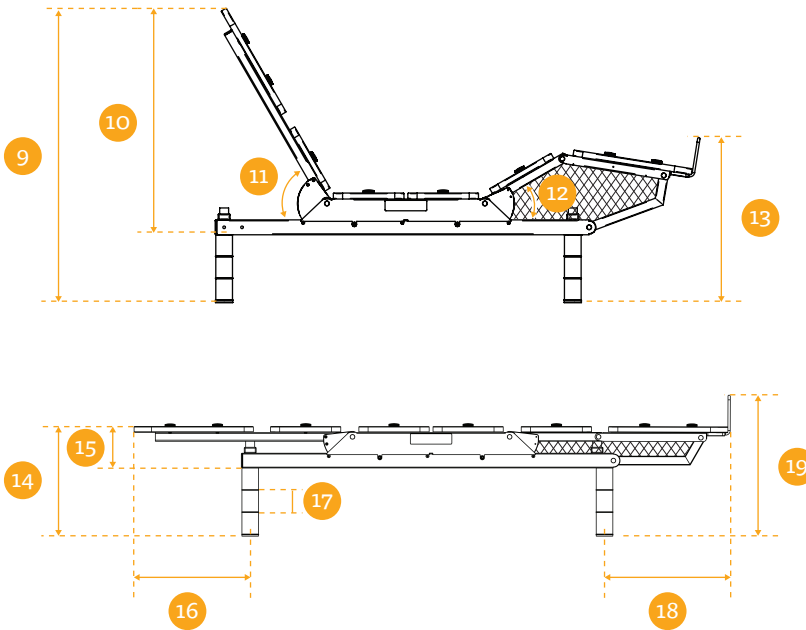

9	38.9"
10	29.9"
11	60°
12	40°
13	23.2"
14	14.7"
15	5.5"
16	15.4"
17	3.0"
18	16.4"
19	18.6"

TECHNICAL DATA

Rated input voltage/current	110 V/2.2 A
Standby power consumption	<0.25 W
Ambient conditions (operation)	Temperature between 41 °F and 140 °F (5 °C and 40 °C). Maximum relative humidity between 95% and 68% (lower allowed)
Ambient conditions (transport/storage)	Temperature between -31 °F and 176 °F (-35 °C and 80 °C). Temperature over 122 °F (50 °C) only for periods not exceeding 72 h. Maximum relative humidity between 95% and 5% (lower allowed)
Max. load (including mattress)*	700 lbs evenly distributed
Wireless working frequency	2.4 GHz
IP protection (IEC 60529)	IP20
Compliant regulations	Restriction of Hazardous Substances (RoHS) 2011/65/EU FCC CFR 47 Part 15 Subpart B/C
Immunity to ESD interference (EN 61000-6-2)	Conducted discharge: level 4 8 kV Air discharge: level 4 15 kV

	Twin XL	Full	Queen	King	Cal. King
Recommended mattress size (l x w)	80" x 39"	75" x 54"	80" x 60"	80" x 76"	84" x 72"
Bed Dimensions (l x w x h**)	78.7" x 36.9" x 14.7"	78.7" x 53.1" x 14.7"	78.7" x 58.0" x 14.7"	78.7" x 73.9" x 14.7"	82.7" x 70.0" x 14.7"
Package dimensions (l x w x h)	75.6" x 17.3" x 5.9"	75.6" x 17.3" x 7.5"	75.6" x 17.3" x 7.5"	75.6" x 17.3" x 7.5"	75.6" x 17.3" x 7.5"
Product Weight	92.0 lbs	108.0 lbs	116.0 lbs	135.0 lbs	131.0 lbs
Package Weight	99.0 lbs	119.0 lbs	127.0 lbs	145.0 lbs	141.0 lbs
Order code	SFS-SYD-TXL-LDS-US	SFS-SYD-FUL-LDS-US	SFS-SYD-QEN-LDS-US	SFS-SYD-KNG-LDS-US	SFS-SYD-CAL-LDS-US

* Max. Load may vary depending on Input Voltage

** Height measured from floor to Platform surface (flat position)