

# DMIclassic C

## The Legend Returns.

## DESCRIPTION

**Mythical.** With the DMIclassic C brand-new look and feel complementing its three-digit display and space for up to four saved memory positions, LOGICDATA has added a modern twist to a timeless classic.

## FEATURES


- Fully-customizable Hand Control
- Modern Look & Feel
- Soft Touch
- Up to 4 Memory Positions
- Responsive Up / Down Function
- Under-desk mounting
- Sliding mechanism to protect pre-installed handsets during transport

### Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH  
Wirtschaftspark 18, 8530 Deutschlandsberg, [office@logicdata.net](mailto:office@logicdata.net)

### North America

LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,  
Cedar Springs, MI 49319, USA, [support.na@logicdata.net](mailto:support.na@logicdata.net)

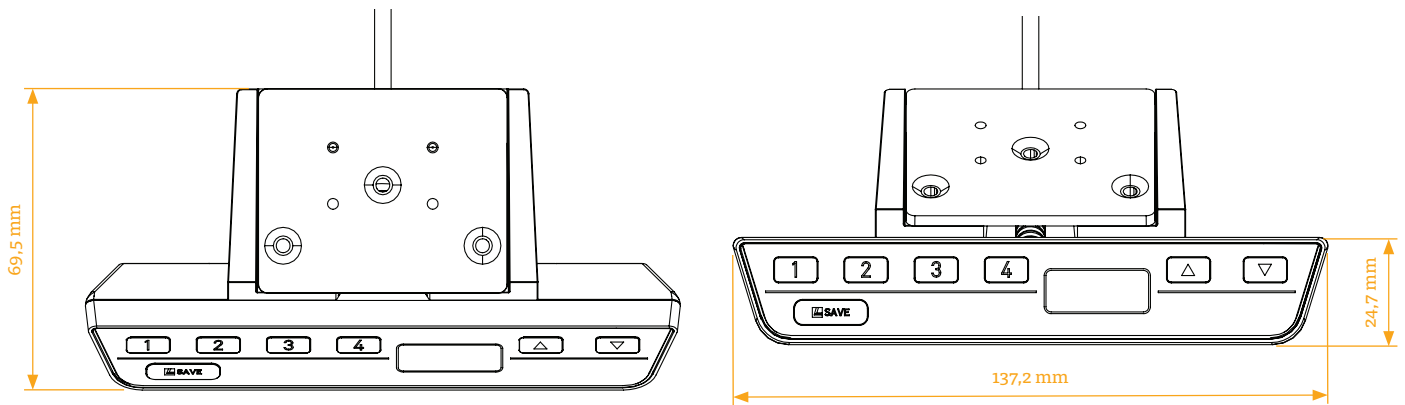

## TECHNICAL DATA

<b>Supply Voltage</b>	28.5 V DC
<b>Current Consumption (average)</b>	30 mA
<b>Current Consumption (standby)</b>	<0.3 mA
<b>Cable length</b>	1 800 mm / 70.866" (± 50 mm / 1.967")
<b>Dimensions (l x w x h)</b>	69,5 mm x 137,2 mm x 24,7 mm (2.736" x 5.404" x 0.974")
<b>Ambient conditions during operation</b>	+5 °C to +40 °C at max. 68% relative air humidity (non-condensing), up to an altitude of 2 000 m.
<b>Ambient conditions during transport and storage</b>	-25 °C to +40 °C at max. 68% relative air humidity (non-condensing). +40 °C to +60 °C at max. 32% relative air humidity (non-condensing). Temperatures of more than +40 °C for periods not exceeding 10h. Product must be acclimatised to acceptable operating conditions before assembly. Contact LOGICDATA for exact specifications.
<b>Compatibility</b>	Part of the DYNAMIC MOTION System
<b>Degree of protection (IEC 60529)</b>	IP 20
<b>Standards and regulations</b>	EMC directive 2014/30/EU RoHS directive 2011/65/EU Dodd Frank Act Section 1502 Prepared for IEC60335-2-116
<b>Order code</b>	DMUI-HSM-B-UD-y-z

Reserved, standard is blank  
 Customer Code, up to 3 characters, standard is "LD"