



LOGICflex X-EU

The Lively Jetsetter.

DESCRIPTION

Our lively jetsetter combines a variety of prized assets from the whole family, including cutting-edge DYNAMIC MOTION and ISP technologies. Ultimate protection, performance and outstanding rounded edge design: delivered as standard.

FEATURES

- Unique leg shaping and design
- Clean, crisp design
- Intelligent System Protection
- 4 integrated sensors
- Brushless motor technology
- Plug & Play technology
- Simple & fast set up
- Compact & e-Commerce designed packaging
- European Technology


Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,
Cedar Springs, MI 49319, USA, office.na@logicdata.net



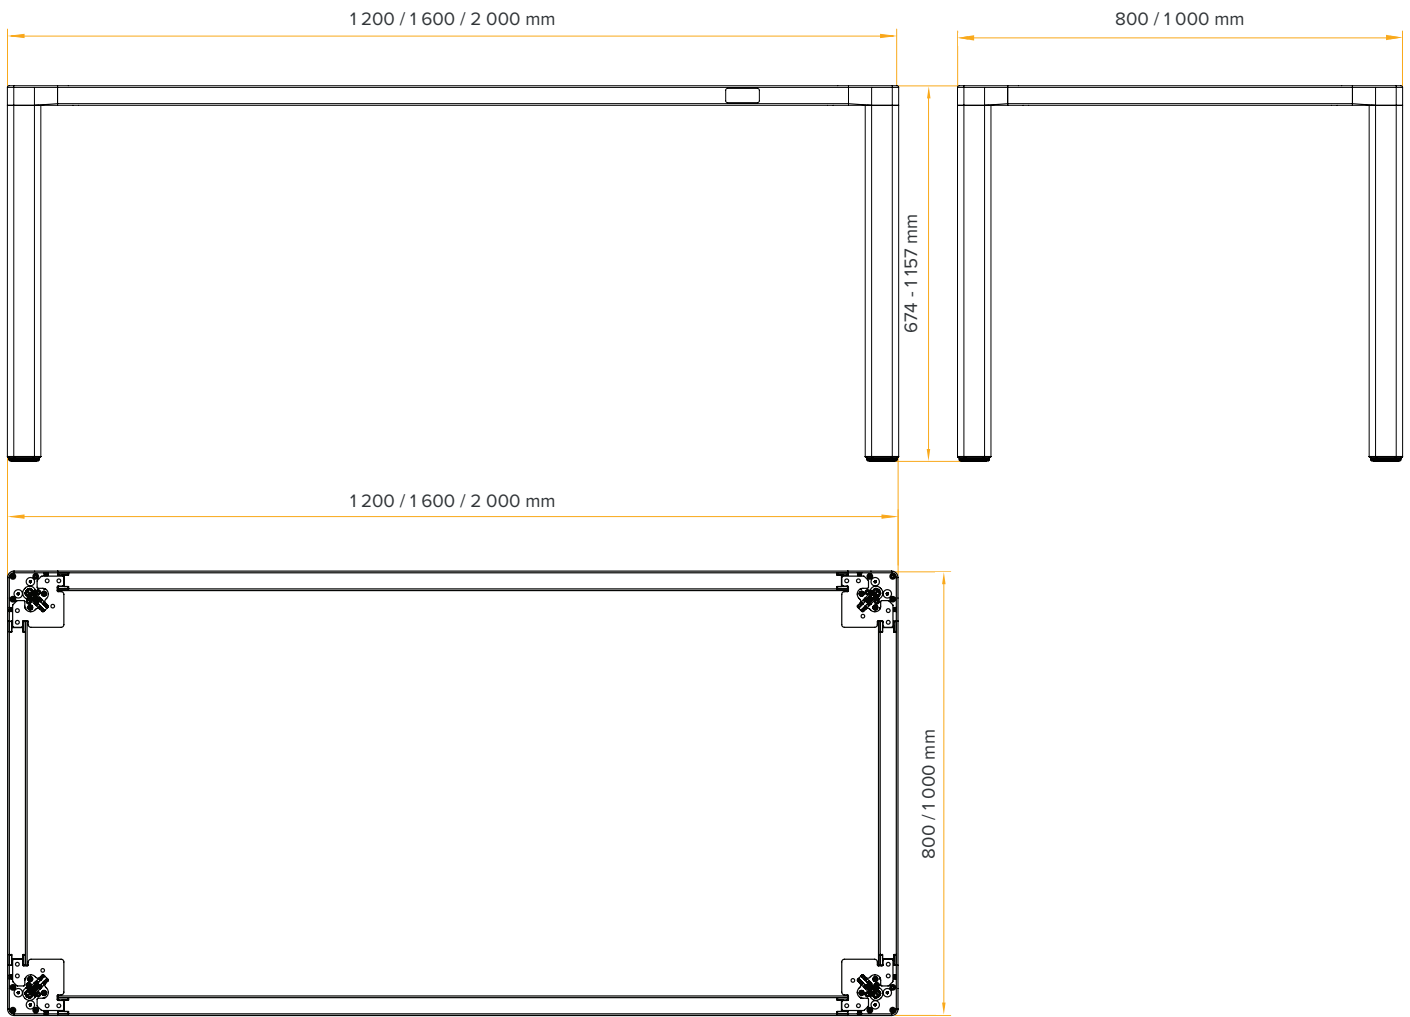

TECHNICAL DATA

| | |
|--|--|
| Frame size | Length and width freely combinable Available lengths: 1 200, 1 600, 2 000 mm Available widths: 800, 1 000 mm |
| Travel range (without tabletop) | 674 mm (± 3 mm) to 1 157 mm (± 3 mm) |
| Stroke | 483 mm |
| Adjustment speed | 38 mm/s |
| Lifting capacity (without tabletop) | 200 kg |
| Max. load | 200 kg |

| | |
|--|--|
| Input rating | 220 - 240 VAC; 4 A |
| Duty cycle | 2 min. ON / 18 min. OFF (load up to 150 kg) 1 min. ON / 18 min. OFF (load up to 150 kg) |
| Weight (frame only) | 6 - 9 kg |
| Weight (complete system) | 27,2 - 30,2 kg |
| Max. leg package weight | 23 kg |
| Max. frame package weight | 6,5 kg (front rail package only) |
| Leg package dimensions (mm) | Length: 790 mm Width: 300 mm Height: 150 mm |
| Frame package dimensions (mm) | 60 × 105 × 1 500 mm for table top sizes up to 1 200 mm 60 × 105 × 2 100 mm for table top sizes up to 2 000 mm |
| Available Colors | Black non-structured, White non-structured |
| Ambient conditions during operation | +5°C to +40°C at max. 68% relative air humidity (non-condensing), up to an altitude of 2000 m. |
| Ambient conditions during transport and storage | Temperature between -35°C and 80°C Temperature over 50°C only for periods not exceeding 72h Maximum relative humidity between 95% and 5% (lower allowed) |
| Applied standards | EN ISO 12100 DIN EN ISO 13854 EN 60335-1 EN 527-1 EN 527-2 EN 62233 EN IEC 61000-6-1 EN 61000-6-3 EN 61000-3-2 EN 61000-3-3 ISO 13849-1 ISO 13849-2, PLb AfPS GS 2019:01 - PAH |

Order code

LOGICflex-A-BB-CCC-DDD-oo

