



LOGICflex X-US

The Lively Jetsetter.

DESCRIPTION

Our lively jetsetter combines a variety of prized assets from the whole family, including cutting-edge DYNAMIC MOTION and ISP technologies. Ultimate protection, performance and outstanding rounded edge design: delivered as standard.

FEATURES

- Unique leg shaping and design
- Clean, crisp design
- Intelligent System Protection
- 4 integrated sensors
- Brushless motor technology
- Plug & Play technology
- Simple & fast set up
- Compact & e-Commerce designed packaging
- European Technology


Contact Headquarters

LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America

LOGICDATA North America Inc., 13617 Woodlawn Hills Dr.,
Cedar Springs, MI 49319, USA, office.na@logicdata.net



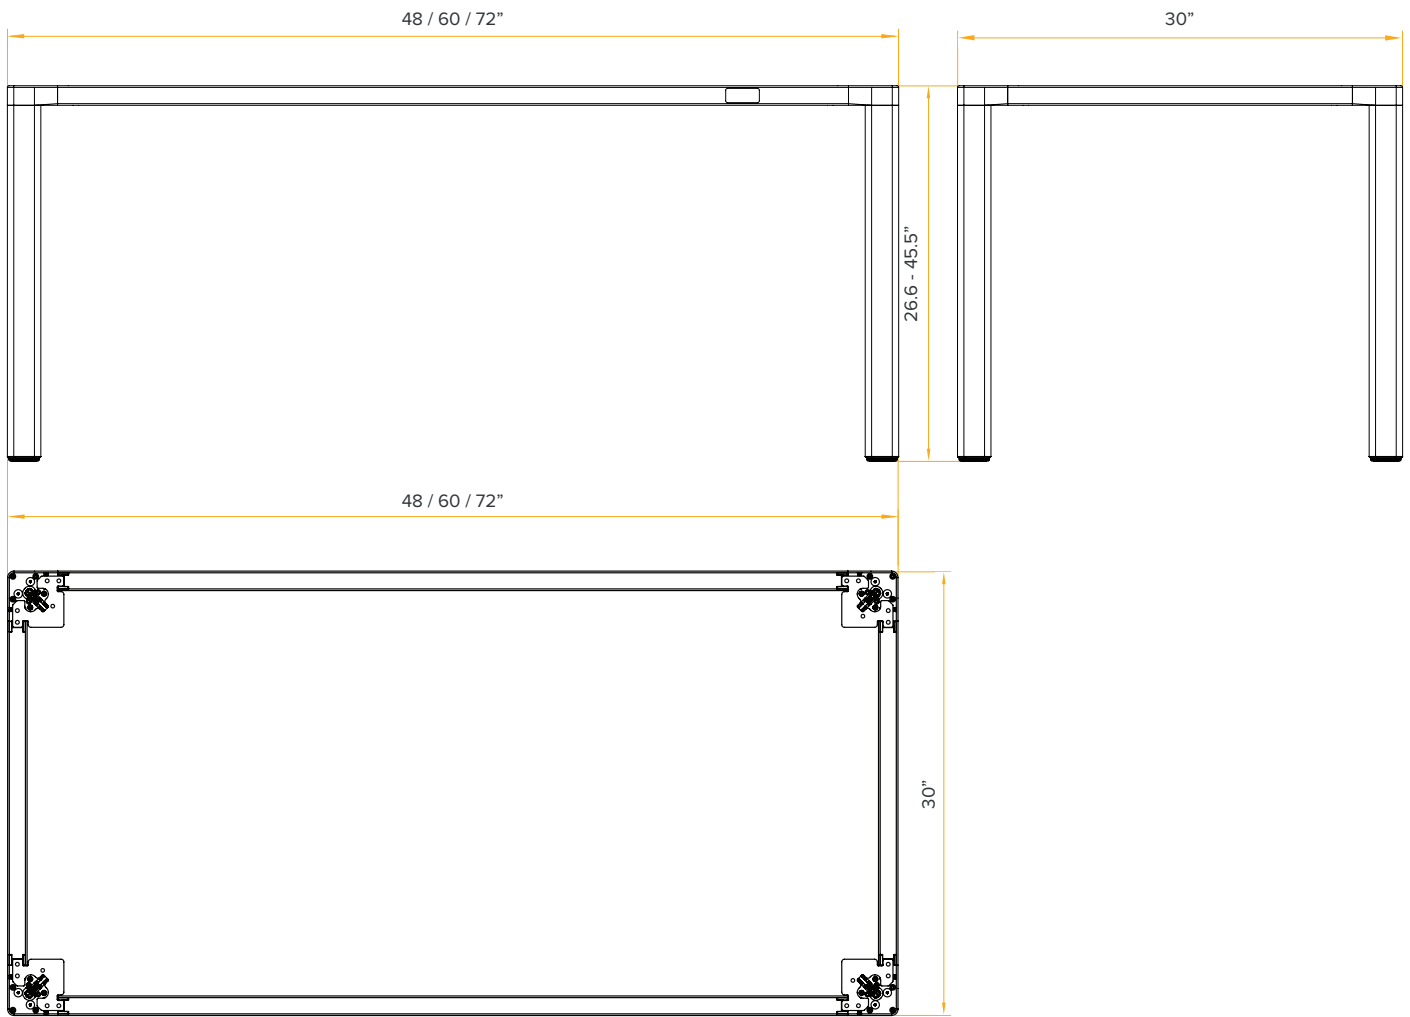

TECHNICAL DATA

Frame size	Length and width freely combinable Available lengths: 48, 60, 72" Available width: 30"
Travel range (without tabletop)	26.5" (± 0.1 ") to 45.5" (± 0.1 ")
Stroke	19"
Adjustment speed	1.5" /s (reduced speed at max. lifting capacity on frame)
Lifting capacity (without tabletop)	440 lbs
Max. load	440 lbs

Input rating	100 - 120 VAC, 6 A
Duty cycle	2 min. ON / 18 min. OFF (load up to 150 kg) 1 min. ON / 18 min. OFF (load up to 150 kg)
Weight (frame only)	13.2 – 17.2 lbs
Weight (complete system)	60.9 – 64.9 lbs
Max. leg package weight	50.7 lbs
Max. frame package weight	13.2 lbs (front rail package only)
Leg package dimensions (inch)	Length: 31.5" Width: 11.8" Height: 5.5"
Frame package dimensions (inch)	2.4" × 4.2" × 59.1" for table top sizes up to 48" 2.4" × 4.2" × 82.7" for table top sizes up to 72"
Available Colors	Black non-structured, White non-structured
Ambient conditions during operation	+5°C to +40°C at max. 68% relative air humidity (non-condensing), up to an altitude of 2 000 m.
Ambient conditions during transport and storage	Temperature between -35°C and 80°C Temperature over 50°C only for periods not exceeding 72h Maximum relative humidity between 95% and 5% (lower allowed)
Applied standards	BIFMA X5.5 UL962

Order code

LOGICflex-A-BB-CCC-DDD-oo

